


ARCO-Modbus WIND SENSOR

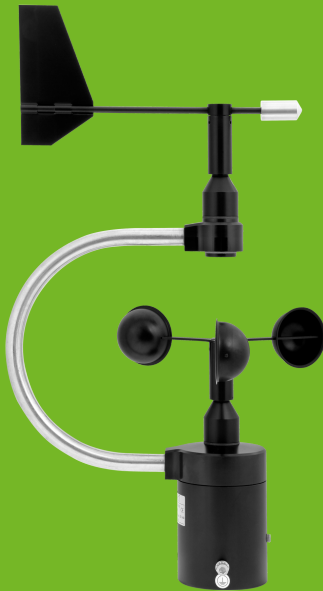

Compact and extremely reliable

The sensors of the ARCO family are very robust, compact and extremely reliable. Due to their shock and vibration proof construction the ARCO-Modbus sensors are particularly qualified for use under severe environmental conditions. The housing and the measuring elements are made of seawater resistant aluminium alloys. The housing, the cup rotor and the wind vane are anodised. The Modbus RTU interface simplifies sensor installation and integration into networks.

- Qualitatively ambitious and cost-effective solution
- Reliable wind measurement, including under extreme weather conditions
- Seawater resistant materials and surface finishes for long-life application, including under harsh conditions
- Quick and easy pipe mounting, connection with just one cable

APPLICATIONS

- Professional meteorological applications
- Building automation
- Photovoltaic systems
- Industrial meteorology

Professional Line	ARCO-Modbus
Id-No.	00.14581.030430
Meas. range wind direction	0...360°
Meas. range wind speed	0.3...75 m/s
Accuracy wind direction	± 1°
Accuracy wind speed	0.5 m/s at 0.3...5 m/s; 2 % FS at 5.1...50 m/s
Resolution wind direction	1°
Resolution wind speed	< 0.1 m/s
Output	RS 485; Modbus RTU
Range of application	Temperature: -30 ... +70 °C; wind speed: 0...80 m/s; rel. humidity: 0...100 % r. h.
Supply voltage	(10...28 V DC), 24 V DC; 20 mA (at 24 V DC)
Housing	Seawater-resistant aluminum; stainless steel
Included in delivery	4-pole M12 plug connector
Accessories (order separately)	32.14567.060010 sensor cable, 15 m, 4 pole, M12 plug 32.14567.060000 sensor cable, 12 m, 4 pole, M12 plug

As of: 17.03.2025